
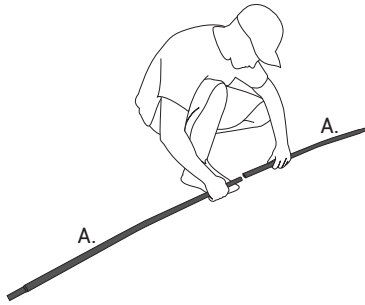



T TANNER TEES NET ASSEMBLY INSTRUCTIONS

COMPONENTS:


- A. Horizontal Cross Pipe..... x 2
- B. Legs x 2
- C. Vertical Tube, lower with female coupling..... x 2
- D. Vertical Tube, upper with grooved coupling... x 2
- E. Metal Stakes..... x 4
- Net, w/ Bounce Back Barrier (not pictured)..... x 1
- Carrying Bag (not pictured)..... x 1

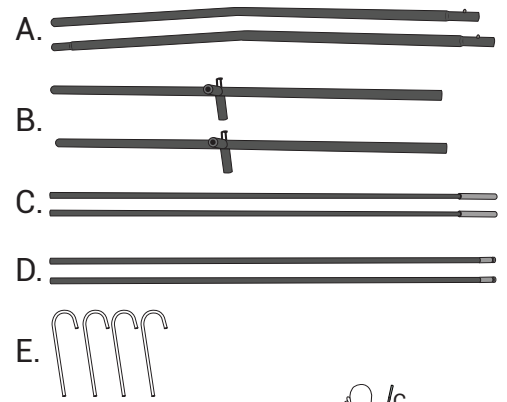


1. Join (2) (A.)Horizontal Cross Pipes.



2. Attach each (B.)Leg to (A.)Horizontal Cross Pipes.

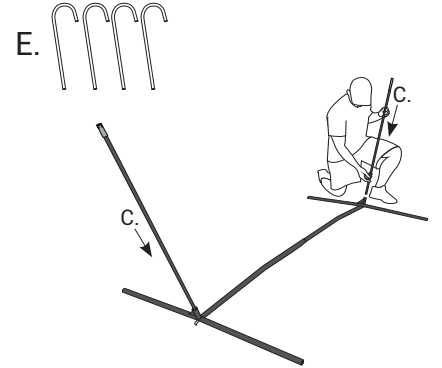


3. Insert (C.)Lower Vertical Tube into opening on each (B.)Leg.

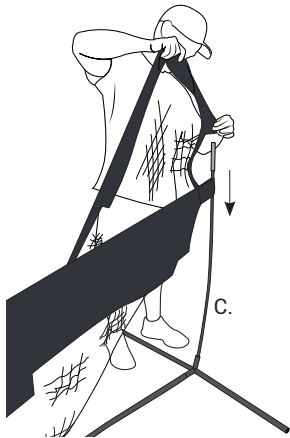

4. Locate the elastic loop and large Sleeve on each side of the net and thread both over the (C.)Lower Vertical Tubes. (It is helpful to bend the Vertical Tube inward while sliding.) Push net down so the female coupling on the Vertical Tube is exposed.




5. Attach the (D.)Upper Vertical Tube to (1) side.

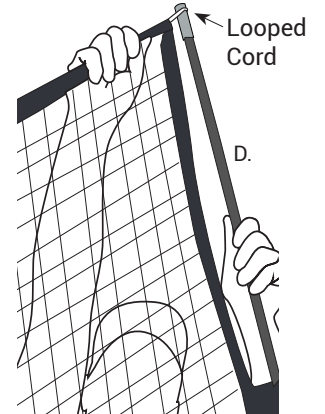


6. Connect top of net to (D.)Upper Vertical Tube by sliding looped cord around the groove on the coupling. (It is helpful to bend the vertical tube inward.)


7. Repeat steps (5) and (6) to attach the upper Vertical Tube and net to the other side.

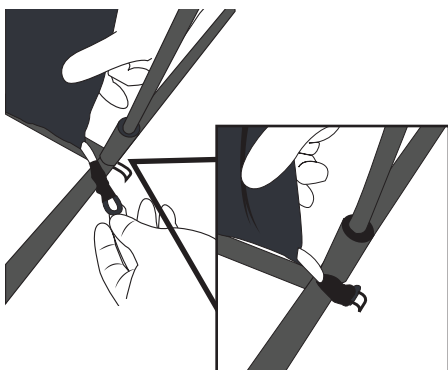

8. Connect the bottom of the net to the frame by pulling looped cord around the (B.)Leg and placing over top of the bent on frame.

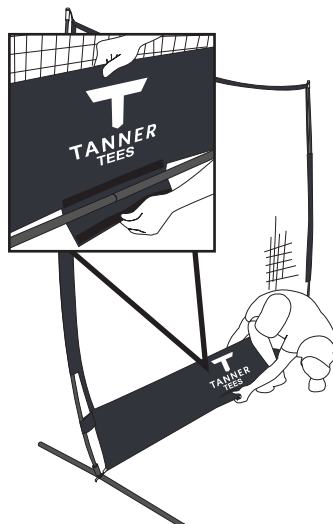

9. Fasten the central Velcro on the (A.)Horizontal Cross Pipe.

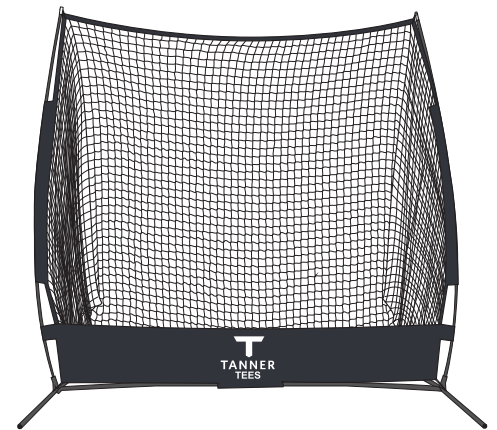

10. The Tanner Tee Logo and Bounce Barrier will face hitter during use.