



COMPONENTS:


- FRAME BOTTOM BAR----- x 2
- FRAME FOOT----- x 2
- THICK SIDE POLE----- x 4
- THIN SIDE POLE----- x 1
- NETTING----- x 1
- STAKES----- x 4
- CARRYING BAG----- x 1

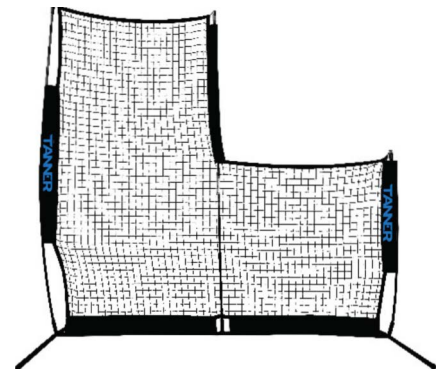


L-SCREEN ASSEMBLY INSTRUCTIONS




1. Lay the netting out with the slot opening of the long pocket in the up position and connect the frame bottom bars. (Note: This will be the bottom of the L Screen)

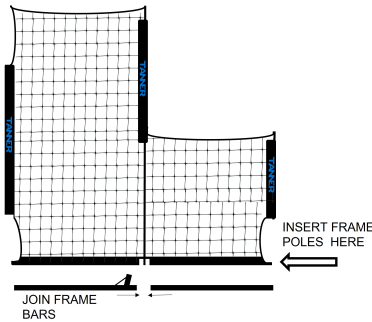


2. Slide the connected frame bottom bar into the long pocket and push the vertical elbow joint (located in center) through the opening in the long pocket. (This is where the vertical pole will insert.)

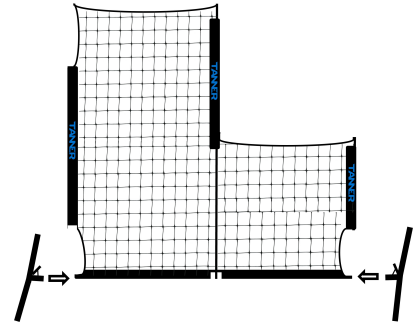


3. Attach each frame foot onto the ends of the bottom bar. Note: The leg with the larger diameter opening goes on the long side of the screen. This is where the thick pole will insert.

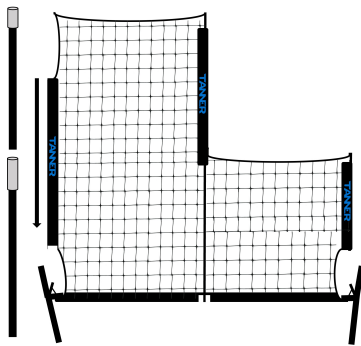


4. Join two of the thick side poles together. Slide the joined thick pole into the long side sleeve.

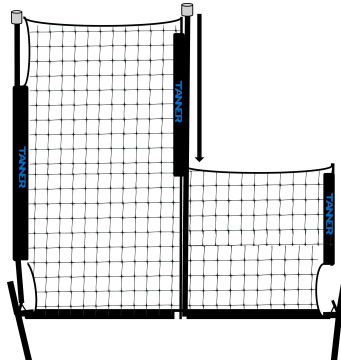


5. Join the two remaining thick side poles. Slide into the center sleeve.

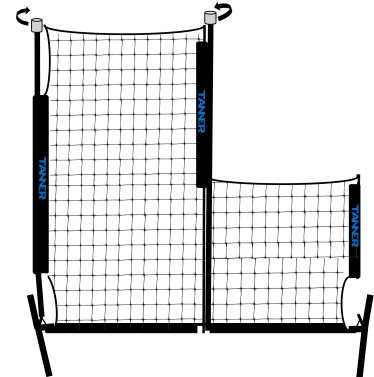


6. Loop the cord over the top of the side pole on the long side of the screen. Repeat this step on the center pole.

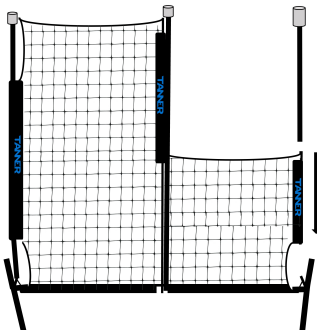

7. Take remaining thin side pole and slide it into the sleeve on the short side of the screen. Place the end of the thin pole into the opening on the foot.

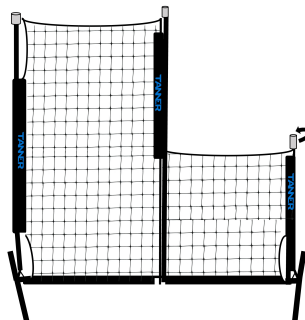

8. Loop the cord over the top of the thin side pole.

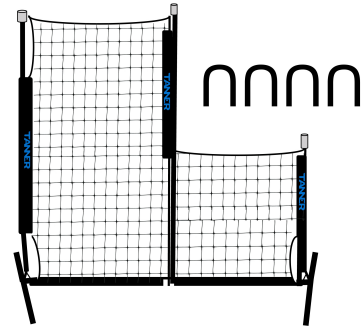

9. Insert the stakes over the frame feet as needed.